



“Velvet Touch” Three Wheel Belt Grinders

MODEL 482

STANDARD
48” BELT
UP TO 2” WIDE



40100 shown



- Contact wheel, platen and workrest support grinding
- Slack belt grinding
- Adjustable belt tension
- Positive belt tracking/patented design
- Quick belt change
- Large throat clearance for enhanced work point access
- Variable speed 120/220-1 PH, and 220/440-3 PH options
- Precision machined cast aluminum frame
- Accepts internal grinding attachments (excluding model 562)
- Accepts nylon, buffing, wire, fiber wheels
- Compact footprint friendly to "cell" manufacturing
- OSHA compliant, enclosed guarding

MACHINE CAN BE
PEDESTAL OR
BENCH MOUNTED.


MODEL 562

STANDARD
42” BELT
UP TO 1”
WIDE

Model 562
shown with
optional dust
scoop, (DS-5)
& pedestal.



56100 shown

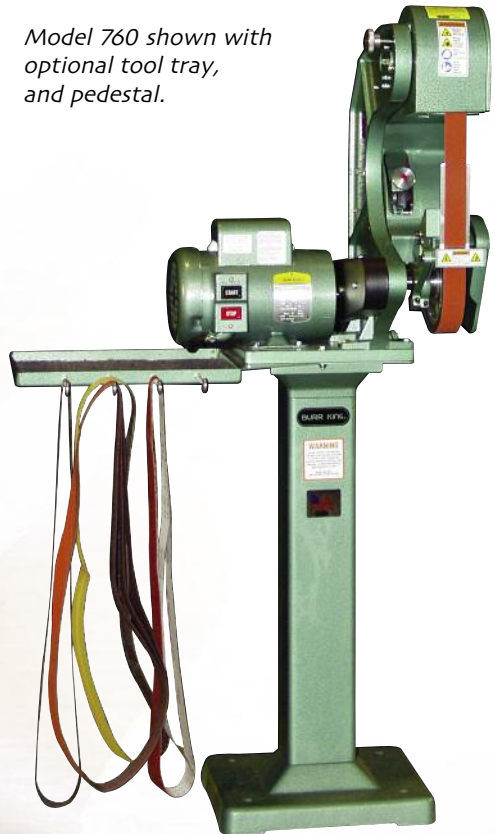

Model 760 shown with
optional tool tray,
and pedestal.