

## Two Stage Gasoline

Designed with both contractors and remodelers in mind, the 8-gallon two stage air compressor is perfect for jobsite tasks requiring a higher CFM and air capacity.

To see more online, scan here  
or go to [www.mitm.com](http://www.mitm.com):



### Compressor Pump


- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

### Frame

- Powder coated 8-gallon twin tank receivers
- 3/16-inch base plate to reduce vibration
- 14-gauge powder coated two-piece belt guard
- Flat-free tires

### Components

- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 16.5-inch fly wheel
- Quality pilot valve unloader

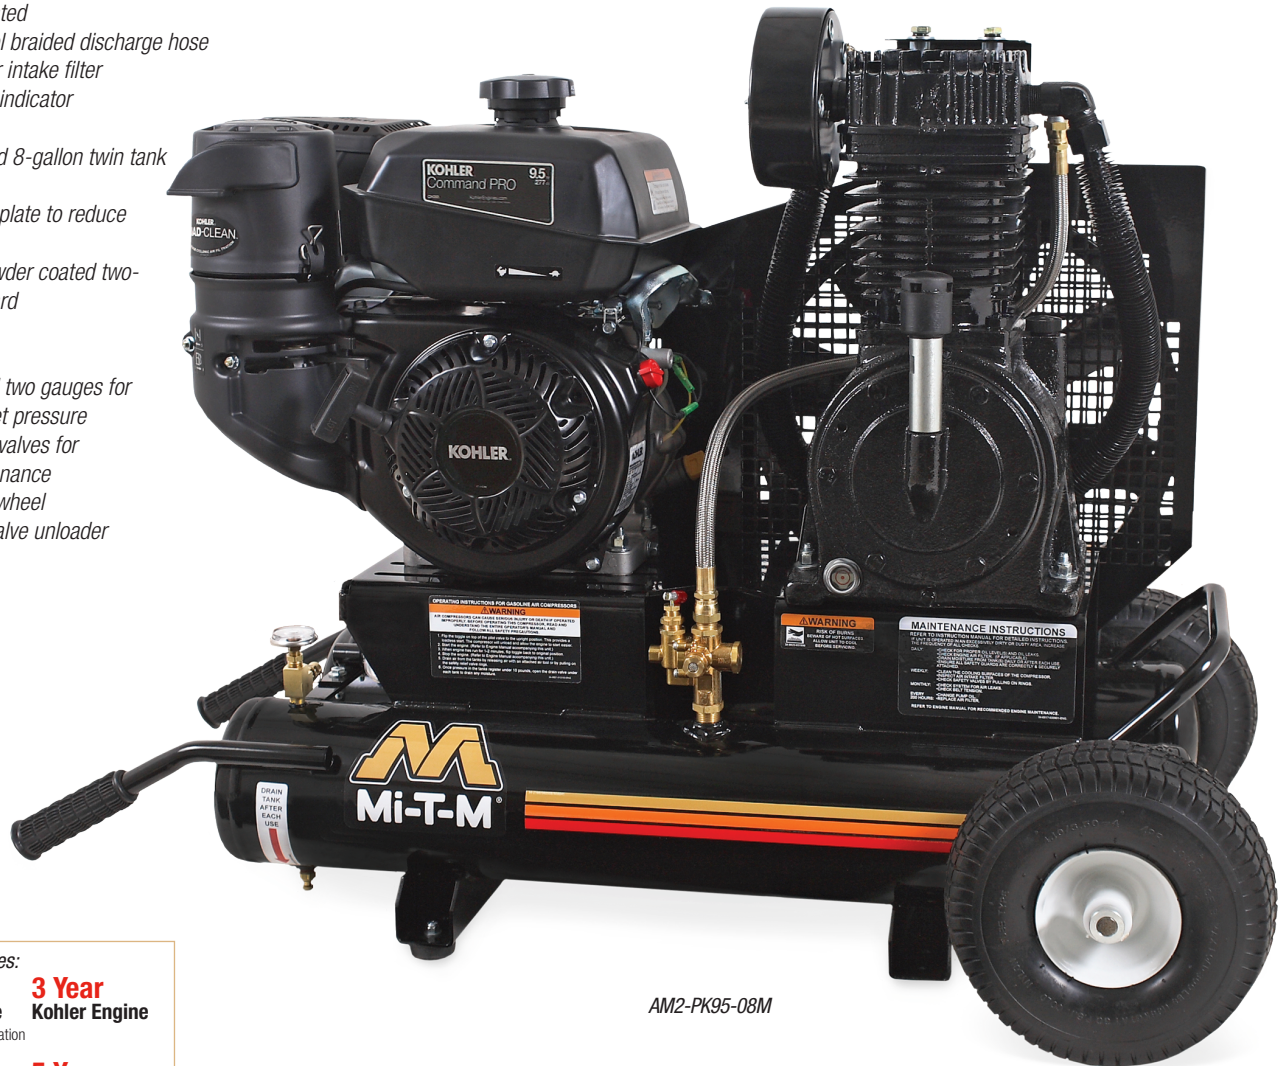

AM2-PK95-08M

#### Limited Warranties:

**2 Year** Pump Exchange  
**3 Year** Kohler Engine  
See page 60 for information

**3 Year** Honda Engine  
**5 Year** Subaru Engine

MODEL NUMBER	CFM @ PSI*	DISPLACEMENT/ENGINE	COMPRESSOR	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AM2-PH09-08M	17.2 @ 175	270cc Honda OHV	Two stage, cast iron	8-gallon	Pneumatic	44x26x31in.	330 lb.	260 lb.
AM2-PK95-08M	17.2 @ 175	277cc Kohler OHV	Two stage, cast iron	8-gallon	Cable throttle	44x26x31in.	330 lb.	260 lb.
AM2-PR09-08M	17.2 @ 175	265cc Subaru OHC	Two stage, cast iron	8-gallon	Pneumatic	44x26x31in.	330 lb.	260 lb.

\*Equipped with 150-PSI maximum rated regulator.

### Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
33-0294	Cable throttle control	AM2-PH09-08M	AX-0015	Electric start - battery and cables not included	AM2-PH09-08M
33-0401	Cable throttle control	AM2-PR09-08M	AX-0041	Electric start - battery and cables not included	AM2-PR09-08M
AW-6000-1002	Equipment cover	All models	IX-0055	Remote start/choke; 6-ft. wire extension for key switch; you will also need to order AX-0015	AM2-PH09-08M
AX-0003	Manual drain/regulator/metal bowl	All models			