




WE'VE WORKED WITH A WIDE RANGE OF APPLICATIONS. HOW CAN WE HELP YOU?

Simplifying one application at a time. PROVEN DEPENDABLE RELIABLE

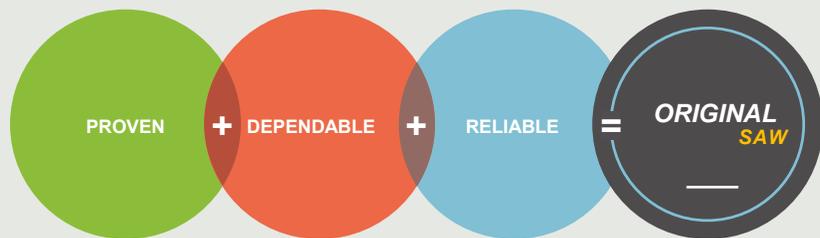

Original Saw Company
465 Third Ave SE
Britt, IA 50423


PH 800.733.4063 - 641.843.3868
FX 641.843.3869
www.originalsaw.com
customerservice@originalsaw.com



3500 Series Radial Arm Saws
3100 Series Horizontal Beam Saws
3700 Series Cross Cut Saws
OS Series Accessories

3500 SERIES
Radial Arm Saws

SUPER DUTY SERIES

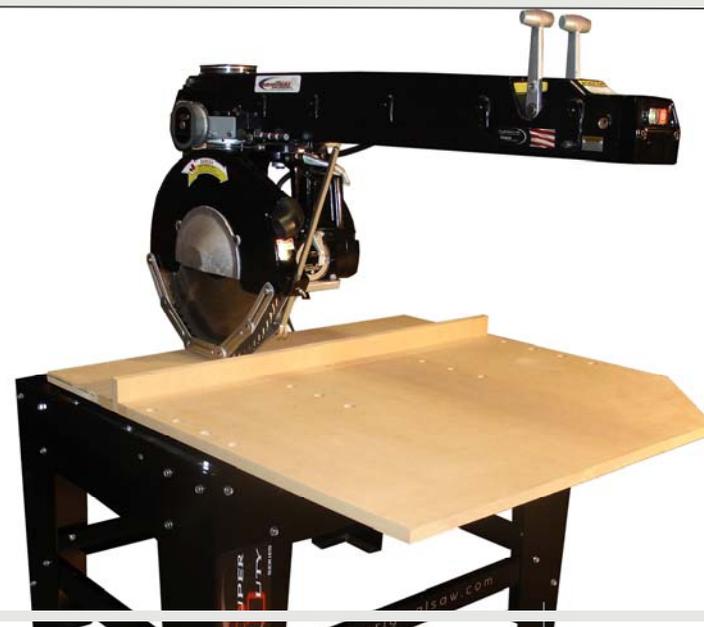

simplifying

cutoff

Super Duty Series wood cutting radial arm saws

www.originalsaw.com see website for details, videos, specifications

The Super Duty Series is the ultimate workhorse of the industry capable of operating 2 to 3 shifts per day. Able to do a wide variety of cutoff and dado operations, these massive 850 pound machines are constructed of cast and ductile iron for vibration free operation. These machines are very versatile and capable of swiveling the arm for miter cuts and swiveling the motor for bevel cuts or combination of both. The yoke also indexes at 90° to rotate and lock the motor into a rip position to allow the machine to rip panels. These machines are found in a wide variety of manufacturing facilities, crating departments, timber home and prefabricated housing manufacturers, door companies, truss plants. The entire Super Duty Series is better than ever with an improved finish, more durable powder coated castings and heavy steel frame. This machine, coupled with our new power carriage feed accessories, make the machine a semi-automatic platform capable of a wide variety of production operations.



Bevel Stop



Miter Scale



Auto Return Reel – standard on units without chain / power feed

MODEL:	3551	3556	3571	3576	3553	3558
Arm	Medium	Long	Medium	Long	Medium	Long
Blade Size	16" / 400mm	16" / 400mm	16" / 400mm	16" / 400mm	20" / 500mm	20" / 500mm
MOTOR: ALL MOTORS TOTALLY ENCLOSED FAN COOLED						
HP	5	5	7.5	7.5	7.5	7.5
Phase	1	1	3	3	3	3
Hertz	60	60	50/60	50/60	50/60	50/60
Volts *	230	230	230/460 *	230/460 *	230/460 *	230/460 *
Amp (rated)	28	28	19 / 9.5	19 / 9.5	19 / 9.5	19 / 9.5
Brake	automatic	automatic	automatic	automatic	automatic	automatic
Arbor	1" x 3 1/8"					
CAPACITIES: inches / metric						
Maximum Out-Rip	40 3/4" / 1035mm	48 3/4" / 1238mm	40 3/4" / 1035mm	48 3/4" / 1238mm	40 3/4" / 1035mm	48 3/4" / 1238mm
Max Cross Cut † Stock	24" / 609mm	32" / 812mm	24" / 609mm	32" / 812mm	24" / 609mm	32" / 812mm
Max Miter 45° † Stock	16" / 406mm	21 5/8" / 549mm	16" / 406mm	21 5/8" / 549mm	16" / 406mm	21 5/8" / 549mm
Max Depth of Cut	4 3/8" / 111mm	6 1/4" / 158mm	6 1/4" / 158mm			
Max Depth of Cut 45° Bevel	2" / 50mm	2" / 50mm	2" / 50mm	2" / 50mm	3 1/4" / 82mm	3 1/4" / 82mm

* note motor voltages available in : 220 v 1 phase 230, 240, 380, 400, 460, 575 3 phase 50/60Hz

Optional Accessories

- Electronic Power Carriage Feed System
- Manual Carriage Feed (hand crank) Systems
- OS Series Manual Measuring Systems
- OS Series Material Handling Extension Tables
- Pneumatic Material Clamping Tables
- Dust Collection Hoods



cutoff

www.originalsaw.com see website for details and specifications